Finite Width Coplanar Waveguide Patch Antenna With Vertical Fed Through Interconnect

Rainee N. Simons *NYMA Inc. Brook Park, Ohio*

Richard Q. Lee and Kurt A. Shalkhauser Lewis Research Center Cleveland, Ohio

Jonathan Owens, James Demarco, Joan Leen, and Dana Sturzebecher *PSD*, *Army Research Laboratory*, *AMSRL-PS-E Fort Monmouth*, *New Jersey*

Prepared for the 1996 IEEE AP-S International Symposium and URSI Radio Science Meeting cosponsored by IEEE, AP-S, and U.R.S.I. Baltimore, Maryland, July 16–21, 1996



Trade names or manufacturers' names are used in this report for identification only. This usage does not constitute an official endorsement, either expressed or implied, by the National Aeronautics and Space Administration.

FINITE WIDTH COPLANAR WAVEGUIDE PATCH ANTENNA WITH VERTICAL FED THROUGH INTERCONNECT

Rainee N. Simons*, Richard Q. Lee®, Kurt A. Shalkhauser®

*NASA Lewis Research Center Nyma Group, ®NASA Lewis Research Center,
21000 Brookpark Road, Cleveland, Ohio 44135

Jonathan Owens, James Demarco, Joan Leen and Dana Sturzebecher

PSD, Army Research Laboratory (ARL), AMSRL-PS-E, Fort Monmouth, New Jersey 07703

Abstract

The paper presents the design, fabrication and characterization of a finite width coplanar waveguide (FCPW) patch antenna and a FCPW-to-FCPW vertical interconnect. The experimental results demonstrate the antenna and interconnect performance. A scheme to integrate an eight element FCPW patch array with MMIC phase shifters and amplifiers using vertical interconnects is described. The antenna module has potential applications in an advanced satellite to ground transmit phased array at K-Band.

I. INTRODUCTION:

A Finite Width Coplanar Waveguide (FCPW) on a dielectric substrate consists of a center strip conductor separated from finite ground planes by narrow slots on either sides [1] as shown in Fig. 1. The substrate thickness, the strip width, the slot width and the ground plane width are denoted as D, S, W and G respectively. The FCPW has all the advantages of conventional CPW [2] and in addition the finite ground planes suppress, the propagation of spurious substrate modes. The spurious substrate modes at high frequencies can degrade the electrical performance of an array antenna. In the past several authors [3], [4] have investigated conventional CPW patch antennas at 4.3 GHz and 8.5 GHz respectively fabricated on a low dielectric constant substrate, $\varepsilon_r = 2.2$. This paper discusses first, the design, fabrication and experimental characterization of a FCPW patch antenna with an integrated feed at K-Band. The width of the CPW ground planes are arbitrarily taken as twice the center strip conductor width which results in a very compact feed design. The entire circuit is fabricated on a low temperature co-firing ceramic tape (Ferro Corp.), $\varepsilon_r = 5.9$. The higher dielectric constant of the substrate material helps to reduce the size of the patch which results in a compact array. The conductor pattern is deposited using gold paste and low cost screen printing technique. Second, the measured performance of a FCPW-to-FCPW vertical fed through interconnect is presented. Lastly, the vertical integration of an eight element FCPW patch array with a system level integrated circuit (SLIC) module consisting of MMIC phase shifters and amplifiers is described. The resulting tile subarray has potential applications in an advanced satellite to ground transmit phased array.

II. INTEGRATED FCPW PATCH ANTENNA:

a.) Construction:

A schematic illustrating the integrated FCPW patch antenna is shown in Fig. 1. The antenna is constructed by widening the center strip conductor of the FCPW to form a rectangular patch. The lowest order of resonance for the patch occurs when the mean slot length summation a-thru-i is one guide wavelength $\lambda_{g(slot)}$. At resonance the electric field lines are as shown in Fig. 1. The antenna radiates with a polarization parallel to the side c-d or f-g.

b.) Measured Characteristics:

The input impedance of the antenna is determined using THRU-REFLECT-LINE on-wafer calibration standards, a pair of G-S-G microwave probes, HP8510C ANA and NIST De-embedding software [5]. The TRL standards are also fabricated on the same substrate as the antenna using the screen printing process. The experimentally de-embedded input impedance at the reference plane P-Q is shown in Fig. 2. The antenna resonates at about 19.95 GHz. The measured E-and H-Plane radiation patterns, gain and the cross-polarization level will be discussed at the conference.

III. FCPW-to-FCPW VERTICAL INTERCONNECT:

A schematic illustrating two back-to-back FCPW-to-FCPW vertical interconnect with a short length of FCPW in between is shown in Fig. 3. The via has a diameter of about 0.01 inch. The rest of the dimensions are same as in Fig. 1. The measured return loss and insertion loss are shown in Fig. 4. These measurements show that, the insertion loss and return loss per interconnect is about 0.3 dB and -30 dB respectively.

IV. INTEGRATION OF ANTENNA OVERLAY WITH SLIC MODULE:

The SLIC module is being developed by Lockheed Martin under a contract from NASA Lewis Research Center. The module consists of four dual channel MMICs with supporting circuitry. Each of the dual channels consists of a 3-bit phase shifter, an analog attenuator and amplitude calibration and control elements. In addition, the module also has a photonic link to bring the 20 GHz RF signals and digital control signals. A second link returns module status to the controller. Fig. 5 schematically illustrates the integration of the antenna overlay with the SLIC module. The results of the overlay characterization will be presented at the conference.

REFERENCES

- [1] R.N. Simons and R.Q. Lee, "Coplanar Waveguide Aperture Coupled Patch Antennas with Ground Plane/Substrate of Finite Extent," Electron. Lett., Vol. 28, No. 1, pp. 75-76, Jan. 1992.
- [2] K.C. Gupta, R. Garg and I.J. Bahl, Microstrip Lines and Slotlines, Dedham, MA: Artech House, 1979, Chap. 7 on Coplanar Lines.
- [3] J.W. Greiser, "Coplanar Stripline Antenna," Microwave Journal, Vol. 19, No. 10, pp. 47-49, Oct. 1976.
- [4] H.-C. Liu, T.-S. Horng and N.G. Alexopoulos, "Radiation of Printed Antennas with a Coplanar Waveguide Feed," IEEE Trans. Antennas and Prop., Vol. 43, No. 10, pp. 1143-1148, Oct. 1995.
- [5] NIST De-embedding Software, Program DEEMBED, Revision 4.04, 1994.

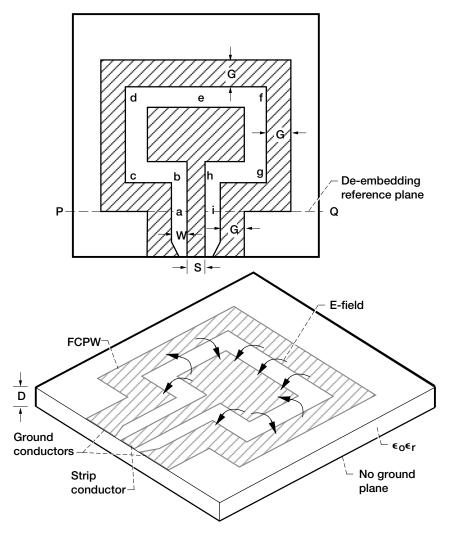


Figure 1.—Schematic of FCPW patch antenna. ϵ_r = 5.9, D = 0.01125 in., S = 0.012 in., W = 0.004 in. and G = 0.024 in.

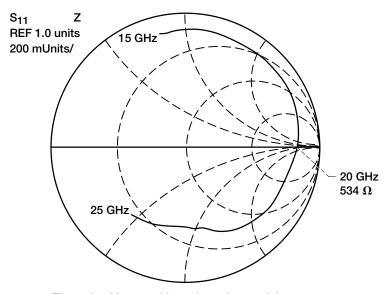


Figure 2.—Measured input impedance of the antenna.

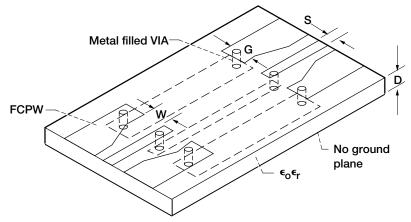


Figure 3.—Schematic of two back-to-back FCPW-to-FCPW vertical interconnect. D = 0.01125 inch, ϵ_{r} = 5.9.

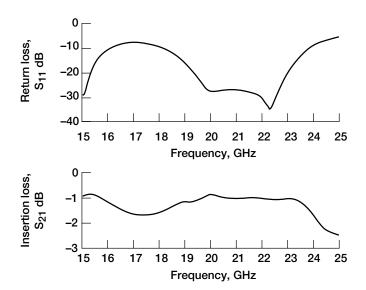


Figure 4.—Measured return loss and insertion loss of the interconnect.

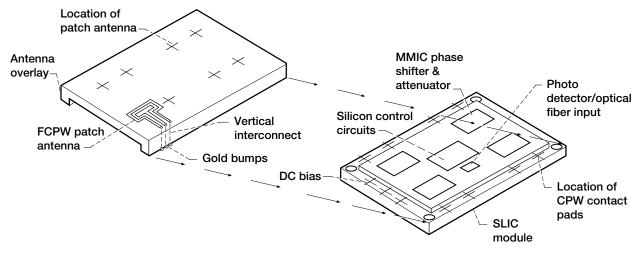


Figure 5.—Schematic of the SLIC module with the antenna overlay.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE	12 DEPORT TYPE AND	DATES COVERED
1. AGENCY USE ONLY (Leave blank)	SE ONLY (Leave blank) 2. REPORT DATE June 1996 3. REPORT TYPE AND DATES COVERED Technical Memorandum		
4. TITLE AND SUBTITLE			5. FUNDING NUMBERS
	guide Patch Antenna With Verti	l l	
6. AUTHOR(S)			WU-506-44-2C
Rainee N. Simons, Richard (Demarco, Joan Leen, and Da	Q. Lee, Kurt A. Shalkhauser, Jo ana Sturzebecher	nathan Owens, James	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)			8. PERFORMING ORGANIZATION
National Aeronautics and Space Administration Lewis Research Center Cleveland, Ohio 44135–3191			E-10066-1
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING
National Aeronautics and Space Administration Washington, D.C. 20546–0001			NASA TM-107136
11. SUPPLEMENTARY NOTES			
S, and U.R.S.I., Baltimore, M Brook Park, Ohio 44142 (wo NASA Lewis Research Cente	Maryland, July 16–21, 1996. Rapirk funded by NASA Contract Ner; Jonathan Owens, James Der L-PS-E, Fort Monmouth, New	ninee N. Simons, NYMA NAS3–27186); Richard on narco, Joan Leen, and D	e Meeting cosponsored by IEEE, AP- A Inc., 2001 Aerospace Parkway, Q. Lee and Kurt A. Shalkhauser, ana Sturzebecher, PSD, Army ble person, Richard Q. Lee, organiza-
12a. DISTRIBUTION/AVAILABILITY STATEMENT 12b.			2b. DISTRIBUTION CODE
Unclassified - Unlimited Subject Category 33			
This publication is available from the NASA Center for AeroSpace Information, (301) 621–0390.			
13. ABSTRACT (Maximum 200 words)			
antenna and a FCPW-to-FCI performance. A scheme to in	ntegrate an eight element FCPW ribed. The antenna module has	experimental results dem patch array with MMIC	anar waveguide (FCPW) patch nonstrate the antenna and interconnect C phase shifters and amplifiers using n an advanced satellite to ground
14. SUBJECT TERMS			15. NUMBER OF PAGES
Microwave transmission; Microwave antennas; Electronic packaging			07
			16. PRICE CODE A02
17. SECURITY CLASSIFICATION OF REPORT Unclassified	8. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICAT OF ABSTRACT Unclassified	TION 20. LIMITATION OF ABSTRACT